


## INSTALLATION

Fixtures are attached to the wall by first, installing an anchor\*, then placing the female portion over it, and screwing into the anchor. We've found the easiest way to hang our boards is to install the top left fixture first, and then hold the board up on this fixture with a level laid on top. When it's in place, mark the center of the remaining holes, and remove the board. Attach the rest of the fixtures and place the board on top. Put the washers on top of the glass before adding the male cap. When installing with an Acrylic Holder, insert holder before the washer and male piece is applied. The Acrylic Holder measures 6¼" wide x 3" deep.

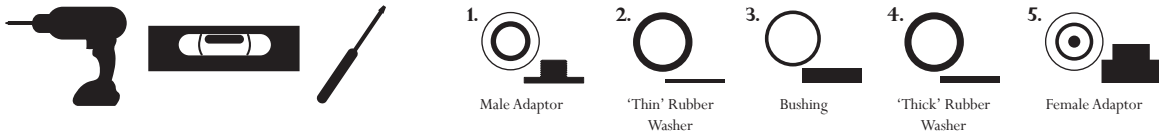



### Parts for Composite Fixtures:

1. A round base, 'Female Adaptor'
2. 2 Thick High-grade Rubber Washers
3. 1 Thin High-grade Rubber Washers
4. A round top, 'Male Adaptor'

### Parts for Powder-Coated Aluminum Fixtures:


1. A round top, 'Male Adaptor'
2. 1 Thin High-grade Rubber Washers
3. 1 white round divider, 'Bushing'
4. 1 Thick High-grade Rubber Washers
4. A round base, 'Female Adaptor'

*\*We supply standard anchors and screws that most clients use for installing; however, there are too many variables for us to specifically indicate what is best for every installation. Some modifications may be necessary.*

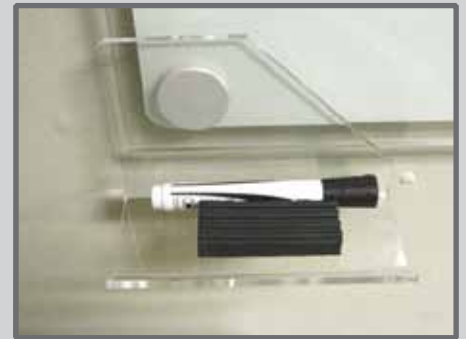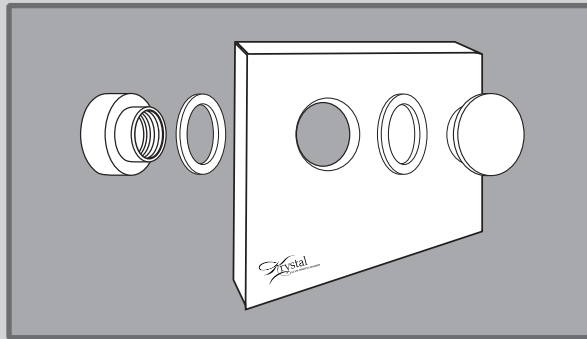

## CARE

Maintenance of your Krystal Glass Writing Board is simple. Use a dry-eraser or dry paper towel to wipe away dry erase markings regularly. Any dry-erase markers can be used. We recommend occasionally using a glass cleaner or wet paper towel to keep clean and clear visibility always.

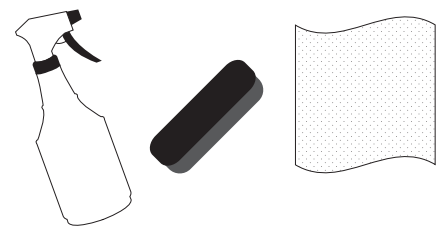

**MADE IN THE USA**